

STEALTH[®]_{XD}

XD Series Mist Collector

Stealth XD mist collector:

1,800-3,600 cfm Water soluble, washer and smoke applications. 1,200-2,400 cfm Oil and fine oils mist applications.

Configurable from 2 stages, 3 stages, or up to 4 stages of filtration are available.



FEATURES AND BENEFITS

- Wide selection of filtration media options solves all your air filtration requirement.
- Exceeds OSHA clean air standard of (5mg/m³). In most cases you'll get better than (0.5mg/m³).
- Stand alone controls options available.
- Custom designed leak proof ductwork assemblies.
- Easy to access filter compartments for quick and easy filter changes, reducing your downtime.
- Cleaner work environment for all your employees.
- An optional VFD for blower motor control lowers your energy costs while maximizing the effectiveness.
- Optional silencers available to reduce sound levels below 77dBA.
- Air purity levels allow for internal air discharge in plant.
- Sump pump options available.
- And much more...

APPLICATIONS

Machining, Drilling, Milling, Grinding, Turning, Broaching, Honing, and more! Engineered to easily control a wide range of aerosols from FINE OIL to WATER SOLUBLE MISTS, PARTS WASHERS to PROCESS DUST and SMOKE.




Do You Want Better Filtration?

Request Your Free Consultation & Quote Today

Office Phone: 248-427-9090

info@fiiltrsystems.com

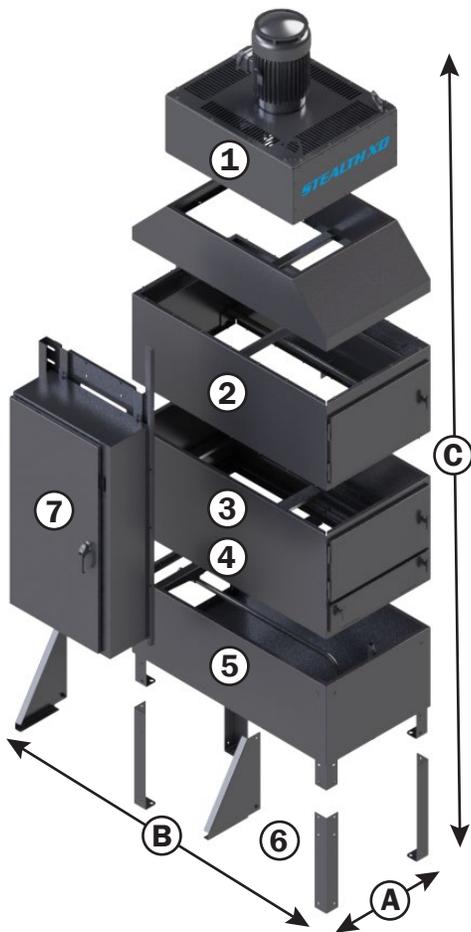

MODERN MODULAR DESIGN

1) Blower Box

Utilizes high efficiency blowers to deliver airflow with minimum energy.

2) Final Filter Stage

Usually a long lasting HEPA filter, but can be tailored to meet your existing specifications.

3) Primary Filter Stage

Captures the majority of mist from the application up to efficiencies of 95% while preserving the lifespan of the final filters.

4) Mitigation Filter Stage

These Filters stops large particulate or high contaminate airflows, reducing the chance of premature plugging of your filter elements.

5) Plenum

The plenum slows down airflow, allowing maximum time for mist to be filtered through the media.

6) Customizable Legs

The XD can be anchored to any surface. Standard 4" legs can be expanded with optional stilts.

7) Control Packages

The XD offers four levels of control package options. Shown here, XB1 control package.

Airflow (CFM)	Dimensions (In.)			Inlet Dia. (in.)	Blower (hp.)	Weight (lbs.)	Filter Stages	Filter Housings
	A	B	C					
Water: 0 - 3600	51.5	27.5	126.0	10 - 14	1.5 - 7.5	1270	3	2
Oil: 0 - 1800	51.5	27.5	126.0	10 - 14	1.5 - 7.5	1270	3	2

Configurable from 2 filter housings with 3 stages per housing.
Single machine or cell based up to (4) machines.

FILTRATION PROCESS

MITIGATION STAGE

Liquid and Solid Pre-Separation

Proprietary multi-layer construction.
Low pressure drop for minimum energy use.
Maximum primary filter stage life.
Suitable for temps up to 350° F
Washable.
Recommended for applications with high loads and fine solids.

PRIMARY STAGE

Advanced Fiber bed Technology Filters

Can achieve HEPA level efficiencies levels with maximum liquid reclamation.
Long-life single use filters.
Temps up to 190° F.
Low pressure drop for minimum energy use.
Suitable for all mist and MQL applications.

FINAL STAGE

High Efficiency Final Filter

Low pressure drop for minimum energy use.
Long-life single use.
Low pressure drop for maximum energy efficiency.
Recommended for in-plant air recycling.
Multiple filter efficiencies available: 95%, 99.75%, 99.97% and others.